

## LN6121 LED HIGH BAY LIGHT




- Extra high luminous efficacy and extra energy saving
- Long lifespan and maintenance free for a long time
- Excellent waterproof & dustproof at protection grade IP65
- High temperature-resistant design
- Anti-shock and anticorrosive structure

### APPLICATIONS

Suitable for industrial plant workshops, warehouses, stations, large-scale constructions, venues, etc.

## TECHNICAL DATA

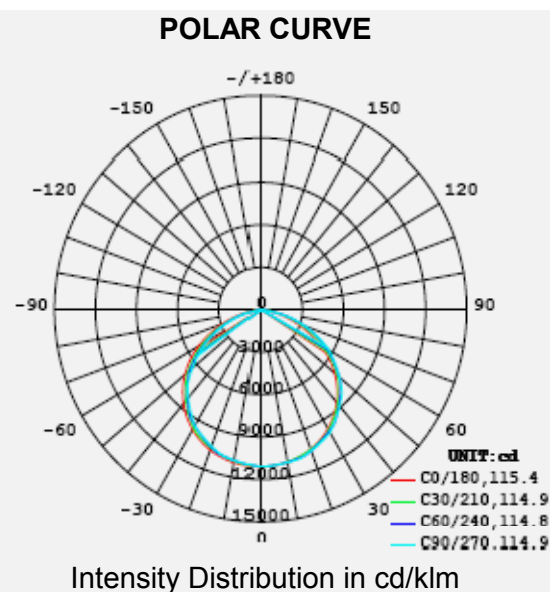

- Voltage and Frequency : 90V~305V AC 50/60HZ
- Degree of Protection : IP65
- Ambient Temperature : -40°C~+55°C
- Cabling :  $\phi 6 \sim \phi 8$ mm
- Class of Insulation : Class I
- Enclosure : Made of Aluminum Alloy
- Transparent Cover : Made of Polycarbonate

**CERTIFICATES : CE, SASO APPROVED**


## FEATURES

- Application of high efficiency LED lighting source ensures extra high luminance and remarkable energy saving.
- Delicately designed seal structure with high protection level of IP65 to stop water and dust from entering into the light source chamber, thus to prevent the light source from aging, light color fading and damage.
- Intensive and large space of radiating fins made of alloy enable the light to be at good heat transmission.
- Strong structure and selected quality components enable the light to work at high frequency shaking area.
- Adopting high quality alloy and high-tech spray coating technique, the lighting fixture is also at excellent rustproof and anticorrosion performance.

## SELECTION TABLE

Model No.	Lamp Type	Lamp Wattage	Luminous Flux	Average Lifespan	Color Temperature	Weight
LN6121	LED	100 W	15000 lm	100000h	2700K~6500K	4.42 kg
LN6121	LED	150 W	22500 lm	100000h	2700K~6500K	4.42 kg
LN6121	LED	200 W	30000 lm	100000h	2700K~6500K	4.78 kg

## DIMENSIONAL DRAWINGS (in mm)

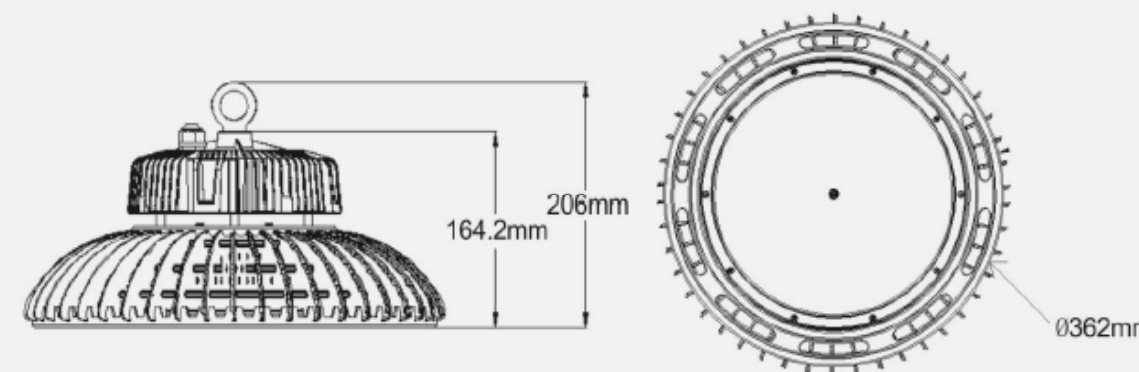

## MOUNTING DRAWINGS



Ceiling Mounting by Bracket



Pendant Mounting by Hook



Pendant Mounting by Pole